

RC 9060



Index

Introductory information	2
1. General	2
2. Security guidelines	2
Installation of the hands-free car kit	4
3. Scope of supply RC 9060	4
4. Positioning of the 3-button remote control	4
5. Connecting the Electronic box	6
6. Installation instructions for the fuses	7
7. Installation instructions switching box AC 5120	8
Operating guidelines	12
8. Initial operation of the hands free car kit	12
9. Handling possibilities	12
10. Establishing a <i>Bluetooth</i> [®] connection	13
11. Accepting, making, ending calls	15
12. Voice Dial	15
13. Voice dial commands	17
14. Head menu	18
15. Dial number	18
16. Phone book	19
17. Redial	21
18. Call lists	21
19. Messages	21
20. Dial Joe Bloggs	21
21. Settings	22
21.1 <i>Bluetooth</i> [®]	22
21.2 Voice Dial	22
21.3 Audio	23
21.4 Device	24
22. 3-Button Remote Control	25
23. Play music with A2DP	26
Further Information	27
24. Service	27

1. General

Dear customer,

Congratulation on purchasing a BURY hands-free car kit. You have chosen a high quality product that is extremely easy to use. All aspects of BURY production through to sales and service are subject to strict quality management according to DIN EN ISO 9001. All BURY hands-free car kits meet CE and e1 security standards. Furthermore, we provide a two-year warranty on all components.

Please read the operating manual carefully so that you can fully enjoy your BURY hands-free car kit. If you have any further questions concerning installation or operation of your car kit, please contact your dealer. He will be happy to give you reliable advice. You can also contact our hotline. Our phone and fax numbers are listed in the chapter Service at the end of the operating instructions.

Have a good trip!

2. Security guidelines

Installation – who and where



The installation of this system can be carried out by yourself but please observe the installation requirements of the automotive manufacturer (VAS 1978). During the installation, park the car at a place where the road traffic is not impaired. We recommend to let a specialised workshop perform the installation.


Power supply



This system has been designed for the use in vehicles with an on-board supply system of 12 volts (passenger car). If you intend to install the device in a vehicle with an on-board supply system of 24 volts (lorry), please use a voltage converter. If you have queries regarding this subject, please contact our hotline.

Position, volume

Install the components of the device in the vehicle so that your field of vision is not impaired and the components are not mounted in the impact zone of the passenger compartment or in the airbag inflation zones. The removal of coverings (with and without airbags) or components of the dashboard requires – in some cases – special tools and special knowledge.



Intended use

We shall not be liable for damages or malfunctions due to improper use of the navigation system. Therefore, do not expose the device to moisture, extreme temperatures or shocks and carefully follow the procedure described in the installation and operating guidelines.



Use while driving

Operate the system only when the situation allows it and when you do not endanger, harm, constrain, or annoy other road users. The volume of the device has to be set in a way that exterior noise is still audible.


Faults

Do not commission the device if you detect or assume a defect. In this case, contact a BURY specialised dealer or our hotline. Improper repair efforts can be dangerous for you. Therefore, only skilled personnel may perform inspections.

Important:

- ▶ The driver is ultimately responsible for the safe operation and control of their vehicle at all times. You should never use a hand held phone, including sending or reading text or picture messages, while driving.
- ▶ Research indicates that there is a risk to safety when the driver of a motor vehicle is distracted and using a mobile phone while driving can be a distraction.
- ▶ The manufacturer strongly recommends that you use a hands-free solution when driving.

3. Scope of supply RC 9060

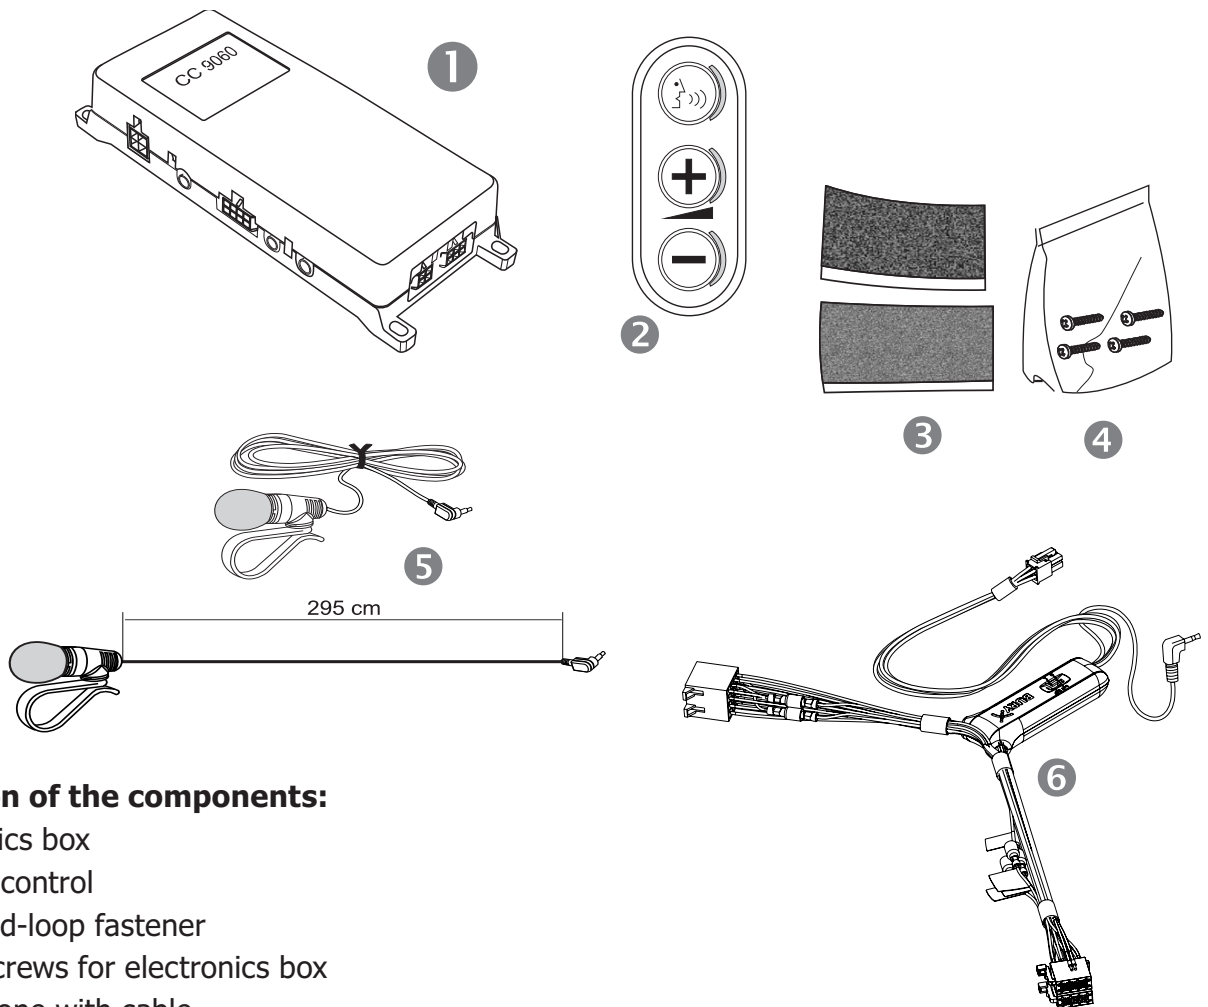

Description of the components:

- 1) Electronics box
- 2) Remote control
- 3) Hook-and-loop fastener
- 4) Fixing screws for electronics box
- 5) Microphone with cable
- 6) Loudspeaker switching box AC 5120

4. Positioning of the 3-button remote control

Step 1:





First of all, choose the most suitable location for the 3-button remote control by positioning it or holding it at different locations in the vehicle yourself. Once you have found a suitable position for the remote control, you can attach it / mount it appropriately. Please use the cleaning cloth provided to remove any grease or dirt from the surfaces. Please remember that in the event of strong temperature variations, depending on the structure and quality, the colours of the surfaces may fade during subsequent use.

Important:

► The remote control can only be stuck down once. Damage to its adhesive surface may occur when it is removed.

Step 2:



Depending on the vehicle type and its equipment (e.g. airbags), it is reasonable to install the microphone either at the A-pillar, at the sun shield or at the roof interior. For details about the equipment features please refer to the vehicle documents. Please also observe the notes on distances to other components and to the driver / speaker, as specified in the installation manual.

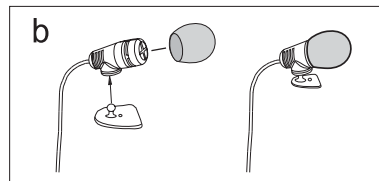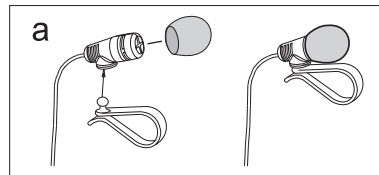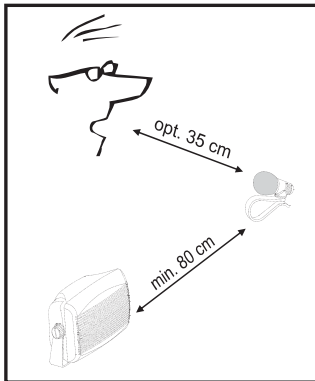**Step 3:**

Please lay the cables in a way that they do not lie/hang unsecured in the vehicle and that they may not influence the conducting of the vehicle. When laying a cable, please take care that it is not under traction stress but that it has some tolerance. Avoid crushing the cable as damages of the insulation can be caused by friction/rubbing.

Step 4:

Install the electronics box at a convenient place in the vehicle. This can e.g. be behind the radio, in the glove box, or in the centre console. Please mind that you can access the connections of the box without difficulty. Before connecting the components to the electronics box you should branch off the battery for safety reasons. In doing so, take into account that there might be a radio coding (confer radio manual).

**Important:**

► Please install the electronics box behind a cover or somewhere you can only reach by opening or unfastening a protective cover/ a cover. The terminal box must not hang loosely in the vehicle..

5. Connecting the Electronic box

Please connect the switch box AC 5120 to the electricity supply of the radio and connect the Molex plug with the electronic box (see chapter: Connection of the loud speaker switch box AC 5120).


Now connect the 3-button remote control (connection 3) and the microphone (connection 5) to the electronics box.

Through connection 4 the hands free set passes on the voice of the dialogue partner during the telephone call. You can connect a separate loud speaker (BURY accessories) or the AC 5120 to this connection. With the latter variation, you use the vehicle's internal sound system for a voice return.

Note:

► If the DIN ISO plug of the AC 5120 does not fit in your vehicle, numerous adapters are available from dealers.

Stereo quality music is emitted at connection point 2. You can also connect the AUX In input of your radio here (if you have one) using an adaptor available from specialist dealers. To be used with the hands-free device, the adaptor must have a 3.5mm stereo jack plug. The connection at the other end will depend on the type of car radio. If your radio does not have an AUX In, you can use the Car CD/MP3 adaptor from the BURY accessories range in order to listen to music on your radio.




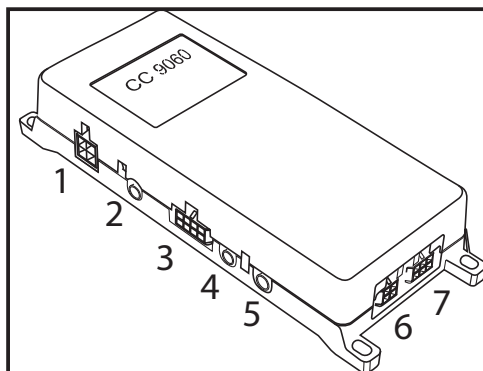


Connection Options:

- 1 Power supply
- 2 AUX-out (without function)
- 3 3-button remote control
- 4 external loudspeakers
- 5 Microphone
- 6 Connection for display (optional)
- 7 System 9


6. Installation instructions for the fuses

If you install the RC 9060 without the switchbox AC 5120 please stick to the following instructions regarding the power supply safety.

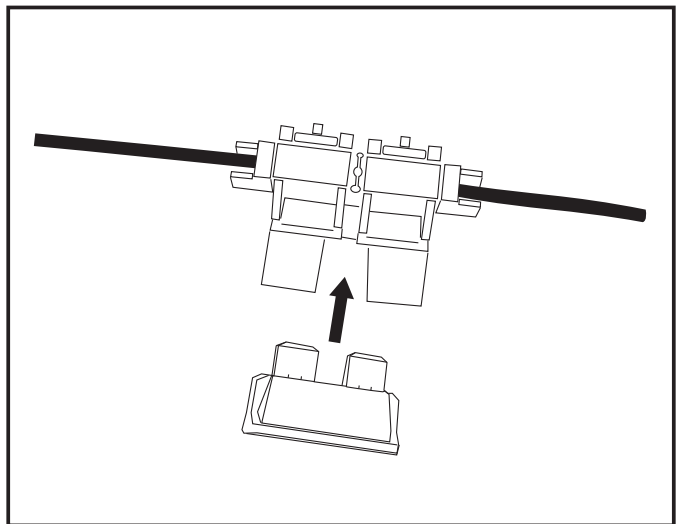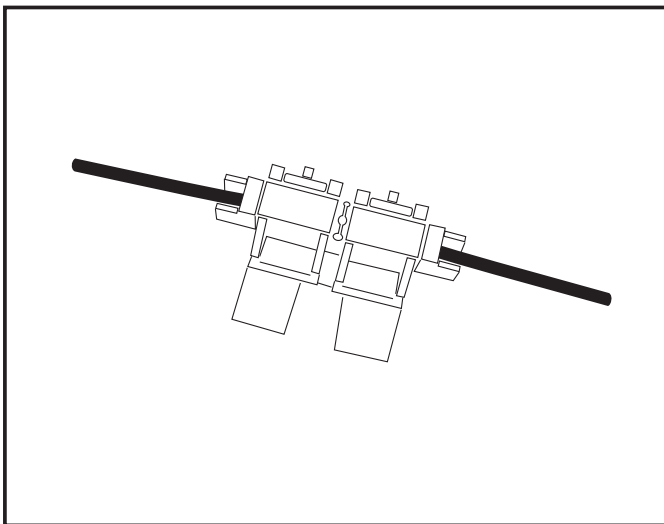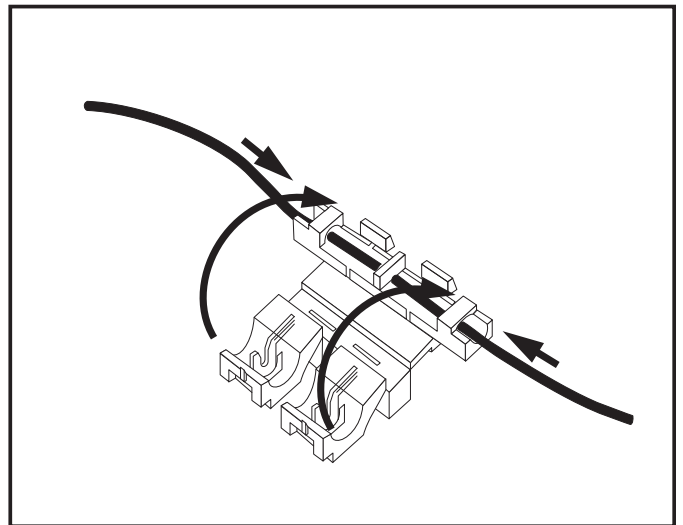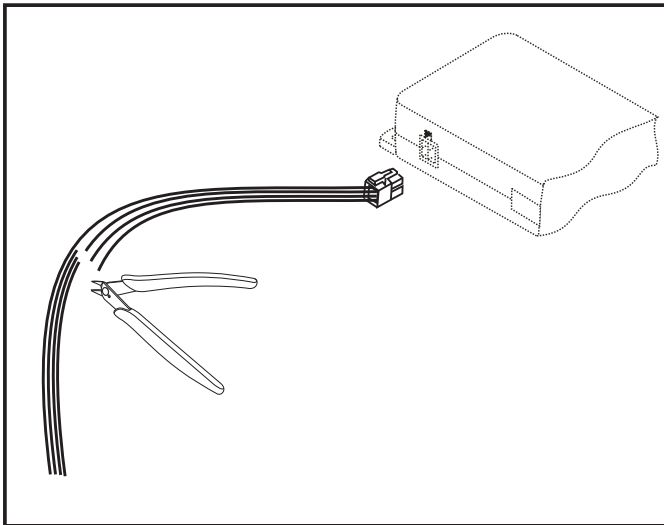

Please cut through the red, the black and the blue cable by means of a wire cutter or scissors. Now insert the two endings of the red cable resulting from the cut into one of the binders, then close it. If you hear two clicking noises, the clamp snapped in properly. Now insert one of the fuses and then repeat the procedure with the other cables.

7. Installation instructions switching box AC 5120

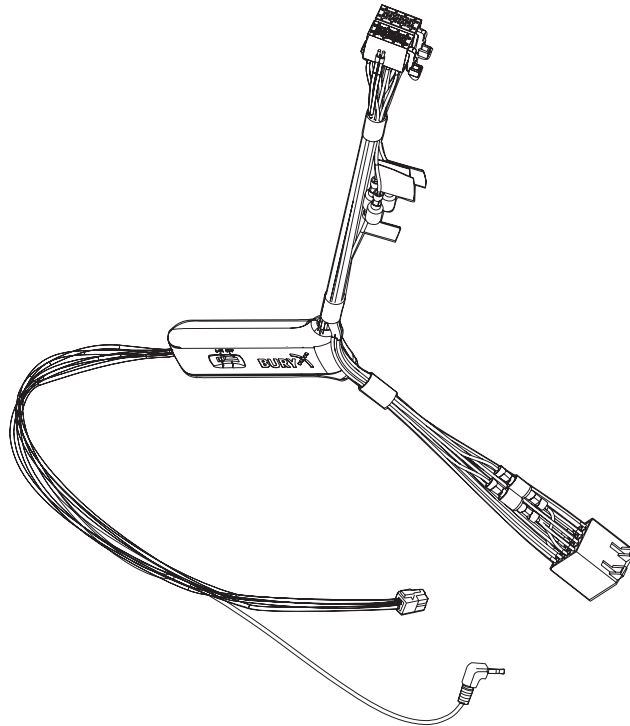


With the AC 5120 speaker switchbox, you get the possibility of being able to mute the feedback of your car radio / CD player etc. and to transfer the voice output of your conversation partner during a telephone call to your vehicle's speakers. This means that the installation of additional speakers isn't required. If your radio has a mute function, then the vehicle speakers are turned onto mute using the radio. If your car radio doesn't have this function, then the signals will be suppressed by the speaker switchbox. You can use the AC 5120 through the connections that your BURY hands free car kit offers, which guarantee voltage supply via molex plugs and also have a speaker output.

If you want to make a telephone call in the hands-free mode, your car radio will be automatically switched on to mute (for the exact operation of your hands free car kit, please read your HFCK user manual). The Audio switchbox now uses one or two loudspeakers in your car for the telephone conversation, even if your radio is switched off. This function will be automatically activated after the installation of the unit, there are no subsequent manual settings required.


Some mobile phones do not support a radio mute function. Please read your telephone user manual for more details. You can find out more detailed information at your specialist retailer, in the internet under www.bury.com, or over our telephone hotline.

After checking that all the cable lengths are sufficient, decide where you are able to attach the Audio switchbox. Now secure the Audio switchbox so that it isn't able to flap about and/or rattle against other parts of your vehicle.

Now connect the audio switchbox plug (1) to the hands-free car kit. (The other, smaller box is used by the audio switchbox plug for the microphone.) Now connect the white power out cable connector (2) of your Audio switchbox to the power supply socket of your hands-free kit.

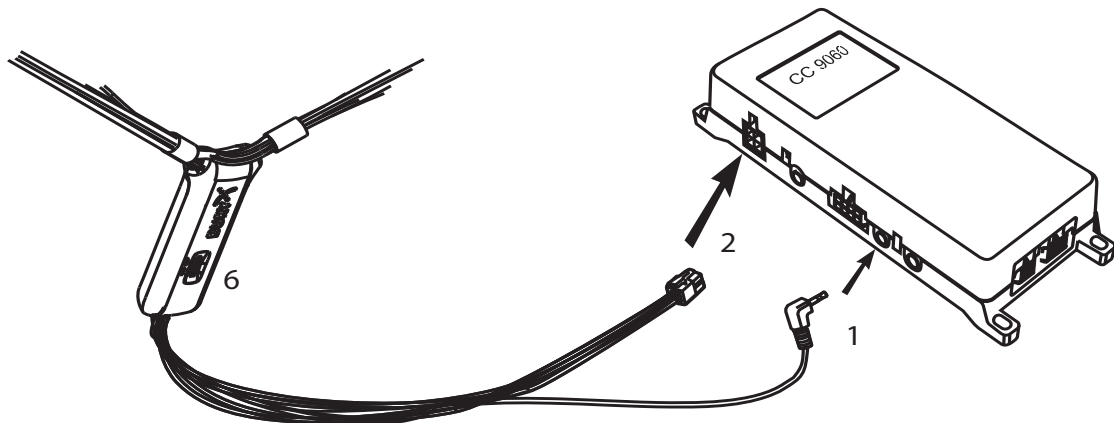

Now disconnect the (a) and/or the (b) loudspeaker connector from the speaker socket on the radio at the back. Connect this connector with the suitable socket (3) on the AC 5120. Now connect the plug (4) with the radio.

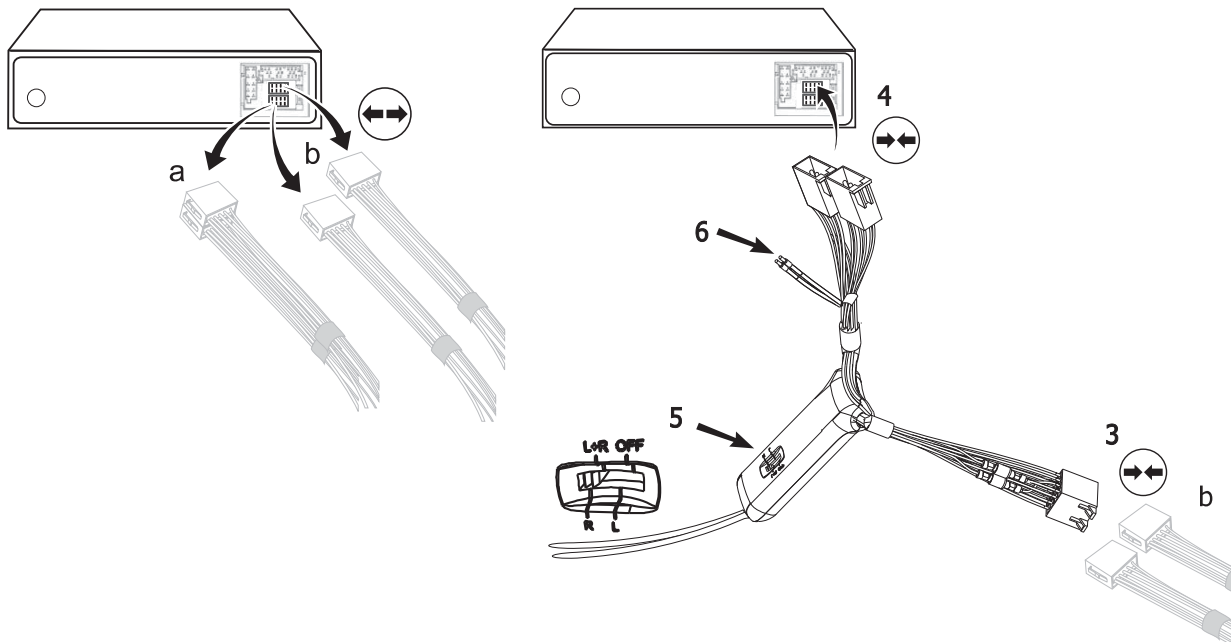


Depending on the switcher position (5), the voice of your conversation partner will be fed back through either the front right speaker, the front left speaker, or through both of the front loudspeakers. The 'OFF' position is to be selected if you connect the switchbox to the radio using the 'Phone-IN' cable (6).

The two 'Phone-In' cables are marked accordingly and must be plugged into the appropriate connections on the radio (blue, green or yellow). In this regard, please refer to the instructions concerning the connection configuration of your car radio in your car radio handbook. In lots of radios, the volume level (feedback of your conversation partner) can be controlled via the phone input and the selection of the loudspeaker.


Different connections of the ISO plug on the radio

The layout of the pins on the ISO plug used in a car depends on the type of car. Before using the switchbox, you should make sure that the connections are correct in order to prevent possible damage to the device.

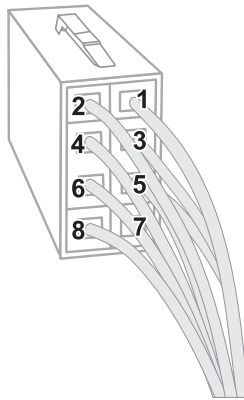


Configuration I

If the assignment of pin 7 of the ISO plug is connected to the DC Power Supply, and pin 4 is connected to the ignition, you should check if the connection looks like the connection presented on the drawing below.

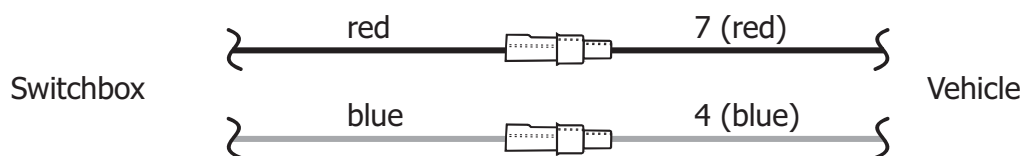


Configuration II

If the configuration of pin 7 of the ISO plug is connected to the ignition and pin 4 is connected to the power supply, you should check to see whether the connection looks like the illustration below.

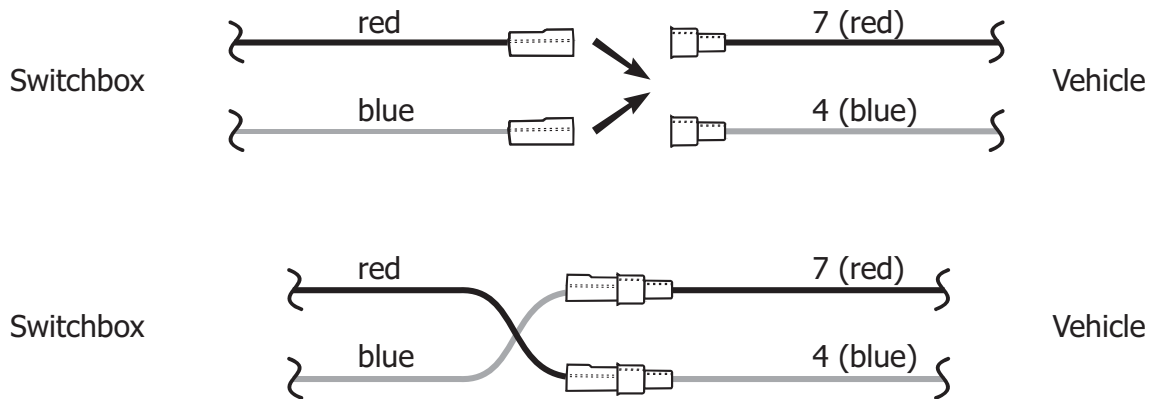

In the operating manual of the radio device, you can find the pin assignment for the "mute" signal. This signal can occur on one of three cables marked with "mute1", "mute2", or "mute3".

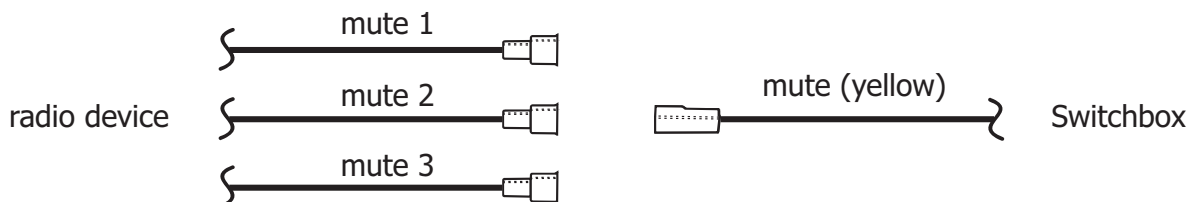

Connect the yellow "mute" cable to the switchbox using the correct cable from the car radio: "mute 1", "mute 2" or "mute3".

ATTENTION:

► The positive wires and ignition wires are protected in the casing of the switchbox with 3A fuses.

8. Initial operation of the hands free car kit

After the power supply and the hands-free car kit (HFK) have been successfully connected, the HFK activates itself when you have switched on the car ignition. You then have to select the operator language.

To select a language, press and hold the Voice Dial Button for a long time (an acoustic sound confirms your selection). By pressing down on the button for a short time you reach the next language.

Please note:

► If you press all 3 buttons at the same time during the start procedure, the HFK is returned to its factory settings.

9. Handling possibilities

The system can be operated in two ways:


1. Operation using voice control



Voice dial
commands

The '**VOICE DIAL COMMANDS**' are highlighted in the further explanatory notes

2. 3-button remote control



Voice Dial Button

+ Button

- Button

Further information is available in the '3 Button Remote Control' chapter.

10. Establishing a *Bluetooth*[®] connection

If you would like to establish a Bluetooth[®] connection for the first time, you must activate the Bluetooth[®] function in your mobile telephone and start the search for Bluetooth[®] devices. Search for a device with the description "CC 9060...". If several devices have been found, please select and connected the hands-free kit and enter the PIN number "1234". Up to ten *Bluetooth*[®] devices recognitions can be stored in the system.

If the automatic connection is activated, no other mobile telephone may be connected. If a new telephone is to be connected, the automatic connection must be initially deactivated using the voice command "**DISCONNECT**". The system then connects with your telephone.

Please note:


► If the connection is successful then you will hear a high pitched beeping tone.

You can find the further possibilities on the table on the next page.

With a successful connection, the data from the telephone book (SIM card) and the address book (telephone memory) are transferred to the HFK. This may take a few seconds, depending on the amount of stored data. If the synchronisation of the telephone book is interrupted, by an incoming phone call for example, it may be the case that not all of the entries are transferred. If this occurs then the telephone book should be manually synchronised once more (refer to the chapter Device).

Note:

► The telephone book on your mobile phone is generally synchronised by the hands-free car kit at regular intervals. For the duration of this short moment, the voice control will not be available to you and you will receive a corresponding message.

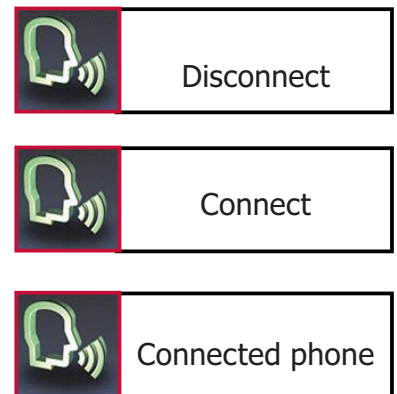

Voice command	Status of HFK	Action of HFK
DISCONNECT	No telephone connected, auto connection off	No telephone is connected
	No telephone connected, auto connection on	The automatic connection is stopped
	Telephone connected	The telephone is disconnected
CONNECT	Telephone is not connected / at least one mobile phone is paired	The automatic connection can only be started if at least one mobile phone has been paired
	Telephone is not connected / no mobile phone is paired	The automatic connection can only be started if at least one mobile phone has been paired
	The telephone is already connected	The telephone remains connected
CONNECTED TELEPHONE	One telephone is connected and the telephone name is recognised	"Telephone <Name> is connected" is read out
	A telephone is connected and the telephone name is not known	"An unknown telephone is connected" is read out
	No telephone is connected	"No telephone is connected" is read out

11. Accepting, making, ending calls

In order to inform the driver of an incoming call, in the display a telephone symbol is shown. At the same time the name and telephone number of the caller (if available) will be shown. The audio system is switched to mute and the ring tone is broadcast through the loudspeaker of the audio system.

You can either accept or decline the call using spoken commands (must be activated in advance, refer to the chapter Device) or accept or decline them using the 3-button remote control.



You will be asked whether you want to `accept` or `reject` the call.

During the conversation you have the possibility of adjusting the volume level of the voice reproduction using the 3-button remote control.

12. Voice Dial

Introduction

With the help of the voice control, the telephone system can be operated through spoken commands. This section explains the essential functions which can be accessed through the voice control. Often a desired result can be reached in several ways.

The HFK itself leads you through some of the expanded functions. If you are not sure which commands you can use in a specific menu, say `**HELP**`. Then all valid commands are then listed. The HFK has a `**user training mode**` with which it can `get used to` accents and dialects.

For information see chapter Voice dial.

Some voice commands can only be called up if a mobile telephone is connected with the HFK using *Bluetooth*[®].

In order to activate the voice control, press down the Voice Dial button on the 3-button remote control. The system then answers with "**Head menu**". After the signal tone, speak clearly in the direction of the microphone.

To deactivate the voice control, press down the Voice Dial button of the 3-button remote control once again.

The system answers with "**CANCEL**". In the event of a long pause, the system responds with the question "**Please say a command**" and asks "**Pardon?**" if it hasn't understood a command correctly. Eight seconds after this, the voice input is deactivated and must be restarted with the 3-button remote control.

With the provision of spoken commands, make sure you speak clearly and at a constant speed.

Note:

► With the use of the voice control it is recommended to turn down the volume of components which are independent of the audio system (e.g. a navigation system) or to switch off the broadcast of traffic jam warnings in order to avoid unintended voice entries.





13. Voice dial commands

The HFK can be operated through the following voice commands. The voice commands are divided into different menus and some commands are only available in certain menus.

With an active HFK, say **`HELP`** if you are not sure which commands are available: the HFK will then name all possible commands.

In addition to these commands, the HFK recognises the numbers from zero to nine. Numbers which are larger than nine must be spoken individually (e.g. 10 = one, zero). To search in the phone book, the HFK recognises the letters **`A`** to **`Z`** as well as the NATO alphabet. For the entry of telephone numbers abroad, the command **`PLUS`** is also available.


When using voice control, in all menus these four commands are always available.

	Cancel	Breaks off the current action
	Head menu	Back to Head menu
	Back	One step back
	Help	Names all commands which are available

14. Head menu

This is where you can find all of the menus which are required for the operation and the configuration of the system. You can find explanations of these in the corresponding chapters.

15. Dial number



It makes sense to divide telephone numbers in short number blocks of 3-4 digits and to say them this way.






After the signal tone you can respectively continue your announcement. Enter the area code (wait a moment so that the HFK can repeat the entry). Enter the first numbers of the actual telephone number (wait a moment so that the HFK can repeat the entry.)

Enter the remaining numbers of the actual telephone number (wait a moment so that the HFK can repeat the entry).

At each break, the HFK repeats the number block and waits for the next number block.


When you have entered the last number block of the telephone number, you can check the complete telephone number once again with the voice command **`PLAYBACK`**.

To dial a number please use the voice dial commands which are displayed on the screen.

	Playback	The HFK repeats the entire telephone number.
	Delete all	The complete number will be deleted.
	Delete last	The last digit will be deleted.
	Dial	A telephone connection is being established.
	Delete group	The last number block will be deleted.

16. Phone book

Press and release the button for the voice control shortly and use the voice command **‘PHONE BOOK’**.



Since your phonebook is scanned with the first coupling of your mobile phone with the system, it is immediately available to you and is stored until you delete the mobile phone from the list (see chapter: *Bluetooth*[®]). The telephone book data can of course only be seen or changed by you. After the first entry has automatically been read aloud, in addition to the standard commands the following voice commands are available:

The marked entry is read aloud again.



The entire list is read aloud to you.



With **‘STOP’** you can stop the process and select the respective entry.

You are able to navigate in the list using the commands **“NEXT”** or **“PREVIOUS”**.

Start your telephone call with the command **“DIAL”**.





‘JOE BLOGGS’ is a placeholder for an entry from your phonebook. If you select a name, you go directly to the respective entry.

Note:

- ▶ It is important that the stated name exactly corresponds with the recorded entry in the phonebook.
- ▶ Please note that telephone book entries, which are only shown in capital letters must be spelt out.
- ▶ Depending on the type of mobile phone, it is possible that the order of the first names and surnames may have swapped around after the telephone book has been transferred.

This is where you are able to search for entries. State an initial letter, and with the voice command **“SELECT”**, all of the entries are read out which begin with the corresponding letter. You can navigate through the list by using the commands **“NEXT”** or **“PREVIOUS”**.










Details

Under **`DETAILS`** you will find if necessary all telephone numbers listed under this entry


Depending on the settings of the mobile phone, when using the HFK, either the contacts on the SIM card, the telephone contacts, or both will be read out to you.

	Dial home
	Dial mobile
	Dial office
	Dial general
	Dial SIM

If the SIM card contacts are selected in the mobile telephone, then only one number will be read out for every name. If the telephone contacts are selected, then up to four categories of number can be used*:
`HOME`,
`MOBILE`,
`OFFICE`,
`GENERAL`.

*This function depends on your mobile phone.

If you say **`NUMBER`**, all stored entries under this name will be read aloud.

	Number
---	--------

In case you have stored more than one telephone number under a name, you can also directly call through the category.
 e.g. **`DIAL JOE BLOGGS HOME`**.

In addition you can allocate a phonebook entry with an own voice command (Voice Tag). This is recommended for names which are difficult to pronounce.

Clearly speak the command into the microphone, the HFK repeats this and you can then make a call to the desired discussion partner from the head menu with e.g. **`DIAL CUSTOMER ONE`**.

In all the HFK can store 150 voice commands. This voice command (voice tag) is valid for all numbers which are allocated to this name. A corresponding inquiry follows about which of these numbers you want to call.



Voice Tag



Store



Playback

Note:

▶ In order to make voice recognition easier for the HFK, please **do not** use voice commands for your voice commands (voice tags) which are also used by the HFK.

17. Redial


The number which was last selected can be selected once again



18. Call lists

This is where all calls that have been made, missed or accepted are listed in chronological order.

You can have the telephone numbers read out to you and if you want, ring back. The navigation within the lists occurs in the same way as it does with the telephone book.





19. Messages

Up to 100 text messages can be stored. Messages can be read out from both the SIM card and the telephone. You can navigate through the list using the commands "NEXT" or "PREVIOUS".

Please note:

▶ With this voice command, you can have new text messages read out to you immediately when voice control is activated.



20. Dial Joe Bloggs

With this voice command, you can ring a contact from your telephone book immediately when voice control is activated.

Please note:

▶ It is always important that the stated name corresponds exactly with the entry which has been saved in the telephone book. Entries which have been stored in capital letters have to be spelt out.










21. Settings

In this menu item you are able to configure the HFK using additional submenus.




21.1 Bluetooth

Here among other things you can determine if the HFK should automatically make a connection with your mobile phone via *Bluetooth®*. In addition you can delete the individual mobile phones or also the entire list of the paired mobile phones and change the PIN code (standard 1234). It is possible to set one mobile phone as default. The device will automatically search first for the default phone and then search for other phones.



21.2 Voice Dial

In this submenu you can carry out the following settings.



'ADDITIONAL HELP OFF': This means that the HFK will only read aloud the most essential commands and confirmations. This setting is recommended if you are well acquainted with the HFK.

The HFK works in general independent from the speaker, that means it can immediately be operated without a **‘Voice training’**. Then user training is only needed if you speak a strong dialect. The HFK reads twenty terms aloud to you which you have to repeat so that the system can “get used to” your voice.

Here you will receive short instructions about the essential functions of the HFK.

21.3 Audio

In this area you have the possibility to change the audio settings of the HFK.

DSP

The HFK has an integrated noise and echo suppression (DSP) which is activated as a standard and ensures the optimal voice quality for most mobile telephones.

Note:

► We recommend that you keep this setting.

If you should still have an inferior voice quality, you have the possibility here to both deactivate the DSP of the HFK or the DSP of your mobile telephone.

RINGTONES

The HFK is sold with four ring tones from which you can respectively select one. With **‘NEXT’** or **‘PREVIOUS’** you can navigate in the list.






With **‘ACCEPT’** the ring tone is selected.

VOLUME

Here, you are able to adjust the volume level of the voice reproduction and ringing tones. The voice commands **‘MORE’**, **‘LESS’**, **‘MAXIMUM’**, and **‘MINIMUM’** and **‘ACCEPT’** are available to use.

MUTE DELAY


Some car radios only activate their muting after a time delay. In order to prevent the voice reproduction from being fed back incompletely, you can delay the voice reproduction of the hands-free car kit by up to three seconds.






Device

21.4 Device




Call answering on

In this sub menu you can choose, if incoming calls should be accepted automatically, manually or via voice.




Language

You can change the user language here.



Sync Phonebook

In this menu point the phonebook can be updated. Some mobile telephones also support the possibility of sending across the complete telephone book manually (OPP-function). If you use this function, automatic synchronisation is deactivated.



System

In the menu point '**SYSTEM**', you can update the HFK or set them back to the factory settings. The software version installed on the HFK is shown under '**Version Info**'. The latest software version can be downloaded under www.bury.com.



Version Info



Software Update




Factory setting

Note:

- ▶ Do not interrupt the power supply during an update.
- ▶ We recommend to let the firmware update be carried out by a BURY specialised retailer.

22. 3-Button Remote Control




You can also complete the most important commands using the 3-button remote control. Please take the details from the table:

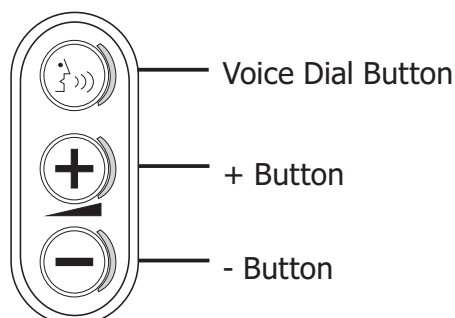

Status of the HFK	Briefly press down the Voice Dial button	Press down the Voice Dial button for a long time	Press the + button	Press the - button
Standby	The voice control is initialised	Repeat call	-	-
Incoming call	The call is accepted	Decline call	Increase volume level of the ringing tone	Reduce volume level of the ringing tone
Outgoing call	The call is ended	The call is ended	Increase volume level of call	Reduce volume level of call
Active call	The call is ended	The call is ended	Increase volume level of call	Reduce volume level of call
Held call	The active call is ended	The active call is ended	Increase volume level of call	Reduce volume level of call
Other call scenarios	End all calls	End all calls	Increase volume level of call	Reduce volume level of call
With voice recognition activated	Voice recognition is stopped	Voice recognition is stopped	Increase volume level of the voice reproduction	Reduce volume level of the voice reproduction
With voice reproduction activated	Voice reproduction is stopped	Voice reproduction is stopped	Increase volume level of the voice reproduction	Reduce volume level of the voice reproduction
Language selection	Next language	Select language	Increase volume level of the voice reproduction	Reduce volume level of the voice reproduction

23. Play music with A2DP

If your mobile telephone possesses the *Bluetooth*[®] profile A2DP, you can play music (e.g. MP3 files) in stereo quality via the HFCK. It is important to play the music title selected respectively on the HFCK via the function ‚play via...‘.



As the menu navigation of the manufacturers of mobile telephones differs considerably, the designation of the selection ‚...*Bluetooth*[®]-stereo-headset‘ may vary. Please read the mobile's user manual to know how to establish an A2DP connection with another system.

If you want to use a second mobile phone for music playback only, then this phone must also be connected to the hands-free car kit beforehand.

To change the loudness settings for the music player, you have to go to **„Settings“ -> „Audio“ -> „Volume“ -> „Music“**.

Note:

► You have to install a special adapter cable to the AUX-Out connector (2) of the hands-free car kit electronic box and the sound system of the car.

24. Service

In case of general or technical queries, suggestions and comments, please do not hesitate to contact our team at any time:

BURY GmbH & Co. KG
Robert-Koch-Straße 1-7
32584 Löhne

Hotline: +49(0)180 5 - 842 468*

Faxline: +49(0)180 5 - 842 329*

* 0.14 €/min. Deutsche Telekom AG landline

E-Mail: hotline@bury.com

Service desk

In case of complaints, please return the product directly to our service desk:

BURY GmbH & Co. KG
Im Hause DPD Depot 103
Robinienweg
D-03222 Lübbenau

Suggestions and feedback are always welcomed.

Notes on the disposal of electronic devices

In compliance with the German law on electric and electronic devices, old electric and electronic devices must not be disposed of together with domestic garbage in Germany, beginning March 24, 2006. If you want to dispose of an old electric or electronic device you are required to take it to a designated collection point ("point of acceptance" or "communal collection point"). There old electric and electronic devices are taken back free of charge.

Version 10/2008
25.1089.0-02-101008

Subject to change. Errors and omissions excepted.

Federal Communications Commission (FCC) Compliance Statement -
United States

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1 This device may not cause harmful interference, and
- 2 the device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC ID: QZ9-CC9060

Remark:

The CC9060 FCC Label mark is placed on to the electronics box.

Industrie Canada (IC) Compliance Statement

This device complies with RSS-210 of Industry Canada.

Operation is subject to the following two conditions:

- 1 This device may not cause harmful interference, and
- 2 the device must accept any interference received, including interference that may cause undesired operation of the device.

Canadian ICES-003 (Interference-Causing Equipment Standard)

This Class B digital apparatus complies with Canadian ICES-003.

IC: 5927A-CC9060